


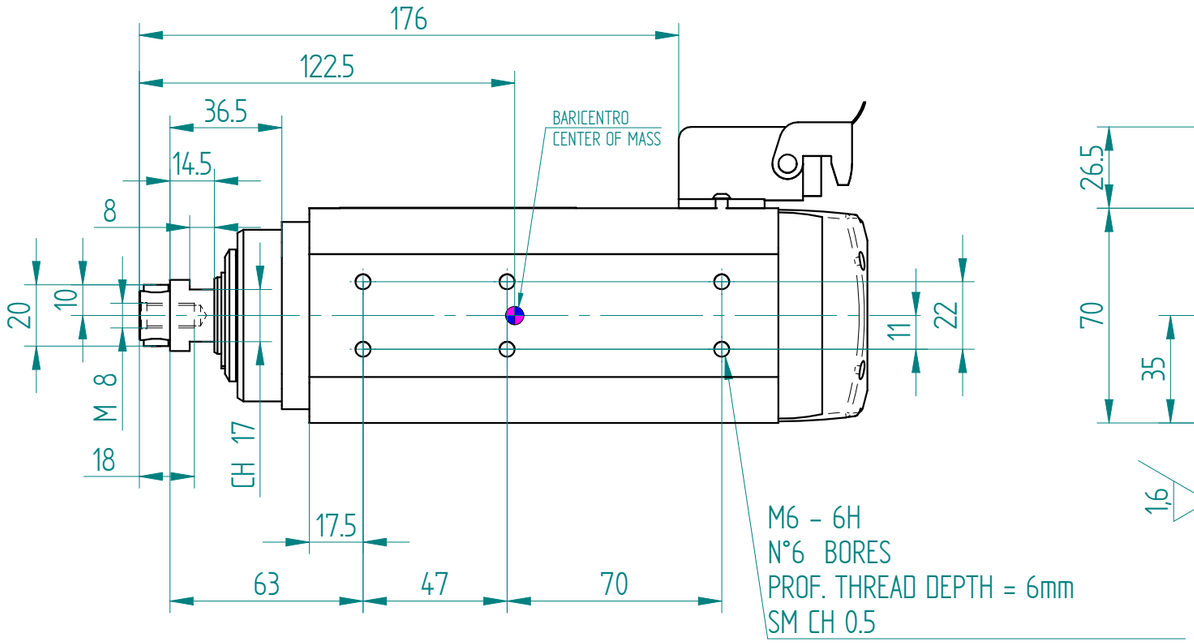


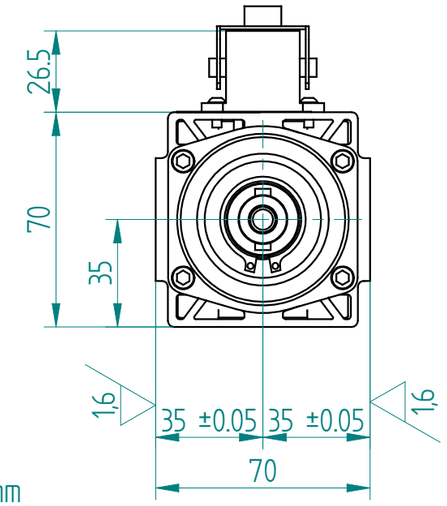


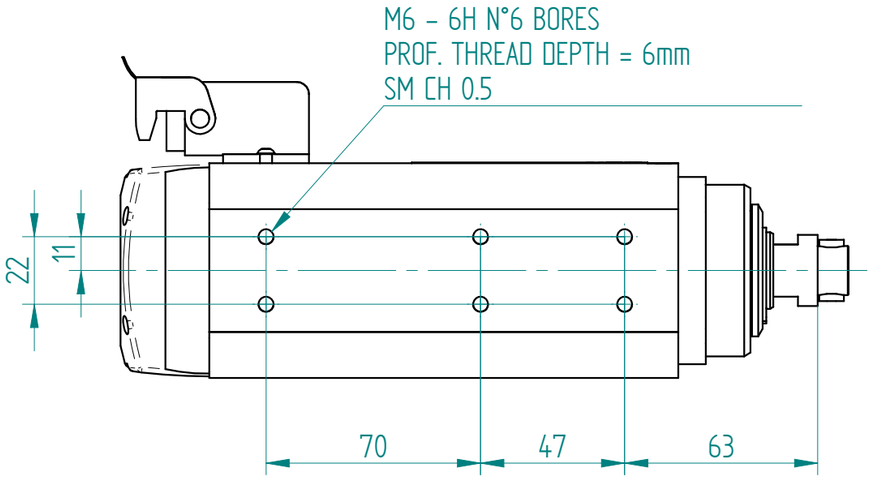

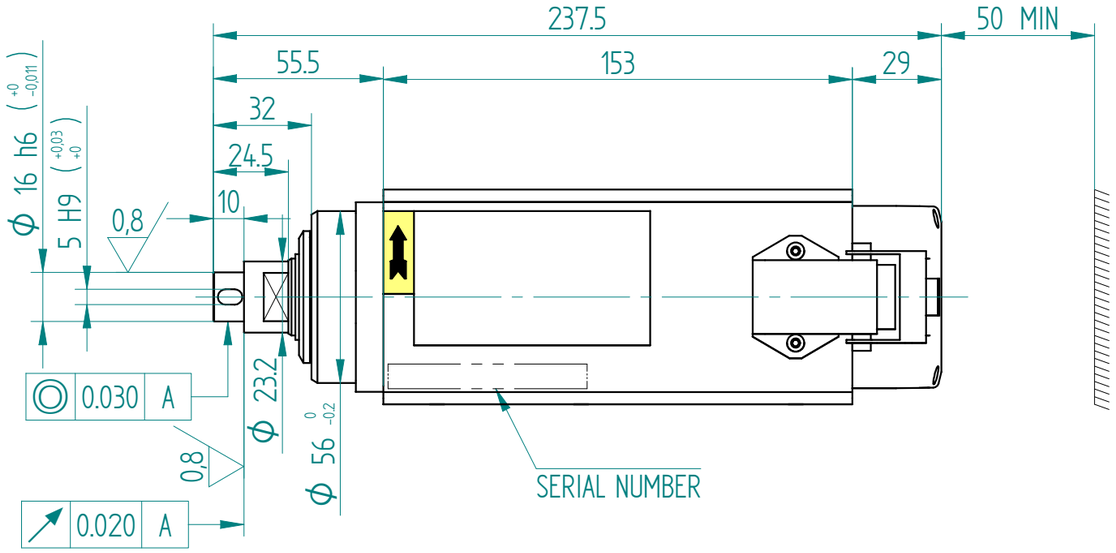

WARNING!!!
DO NOT RUN THE ELECTROSPINDLE
WITHOUT TOOL


ELECTRIC CONNECTIONS




Nr. Pin	Description
1U	Motor phase
2V	Motor phase
3W	Motor phase
4 **	Bi-metallic
5 **	Bi-metallic
	Earth connection

** See "User's guide" for technical informations

PERFORMANCES AND MOTOR RATINGS

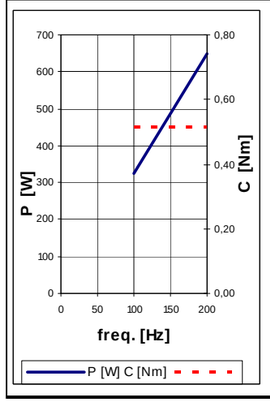

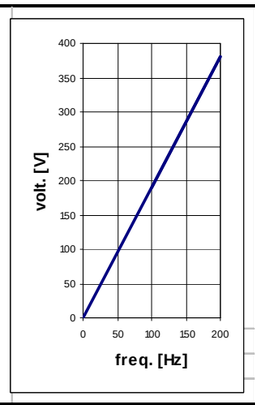

Voltage	V ±10%	380	0	0
Output Power	kW	0,65 (0,8)	0	0
Current	A	1,6 (1,9)	0	0
Frequency	Hz	200	0	0
rpm	rpm	12000	0	0
Torque	Nm	0,5 (0,6)	0,00	0,00
Front Bearing		radial		
Post. Bearing		radial		
Efficiency	η	0,9		
Power factor	cos φ	0,7		
Poles		2		
Service type		S1 (S6 40%)		
Insulation class		F		
Cooling		Forced air		
Weight	Kg	~ 5		
Type of Protection	IP	50		

REPRODUCTION AND OR DISCLOSURE OF THE DRAWING IS FORBIDDEN

REV.	REVISION DESCRIPTION	DATE	SIGN

	DRAW BY	CHECKED BY	APROVED
DATE			
SIGN			

SCALE : 1 : 2
WEIGHT : 4,831 kg
RAW :
REPLACE :
MATERIAL :
HEAT TREATMENT :
SURFACE TREATMENT:
CICLO DI VERNICIATURA : *PAINTING CYCLE :*

A3

POSITIONS WITHOUT TOLERANCE INFORMATION
- *MECHANICAL WORKINGS :* UNI EN 22768-fH
- *WELDMENT:*
- *MELT CASTING :*

REVISION 0

DESCRIPTION : A001388-HT1055-090-0,65KW-S1-L-380V-DX-12/12000-C

DRAW N° 6164H0015