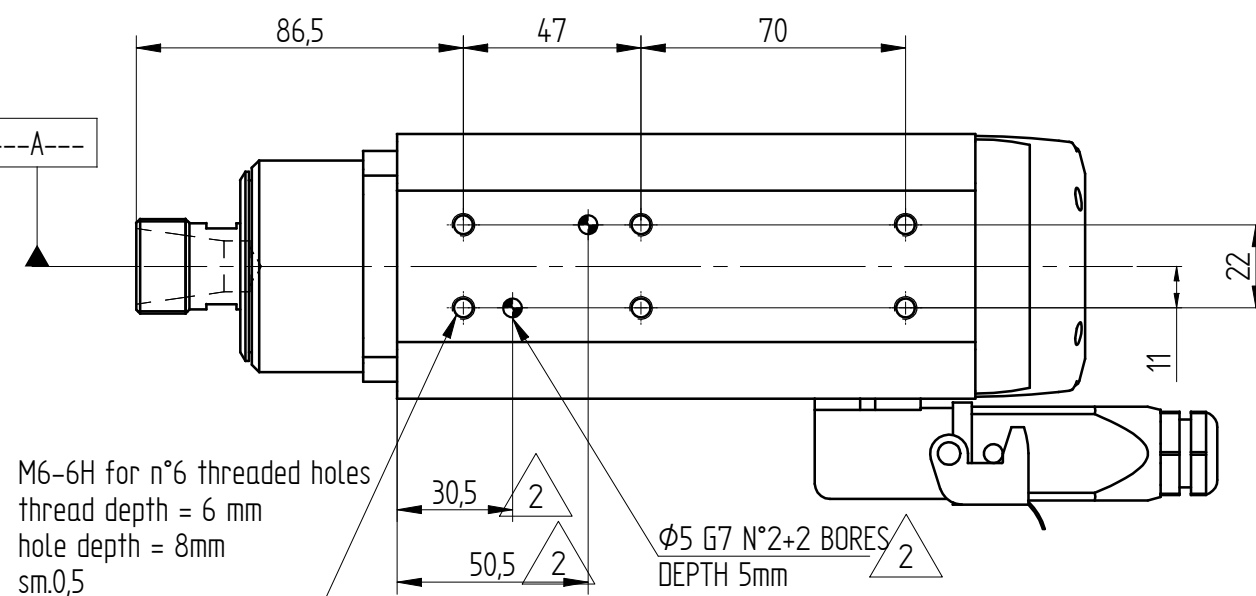
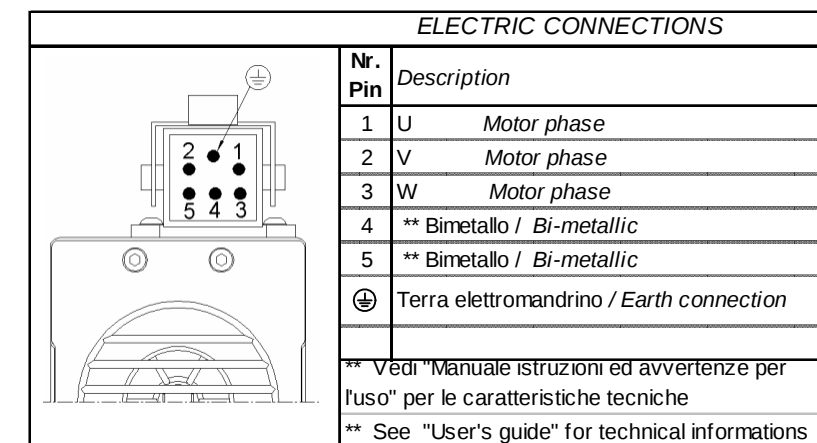


Voltage	V ±10%	380	380	380
Output Power	kW	1 (1,3)	1 (1,3)	1 (1,3)
Current	A	3,2 (4,2)	3,2 (4,2)	3,2 (4,2)
Frequency	H z	300	350	400
rpm	rpm	18000	21000	24000
Torque	N m	0,53 (0,69)	0,45 (0,59)	0,4 (0,52)
Front Bearing		Angular contact bearing		
Post. Bearing		radial		
Efficiency	η	0,65		
Power factor	$\cos \varphi$	0,75		
Poles		2		
Service type		S1 (S6 40%)		
Insulation class		F		
Cooling		Forced air		
Weight	K G	3,5		
Type of Protection	IP	50		

[illegible]