


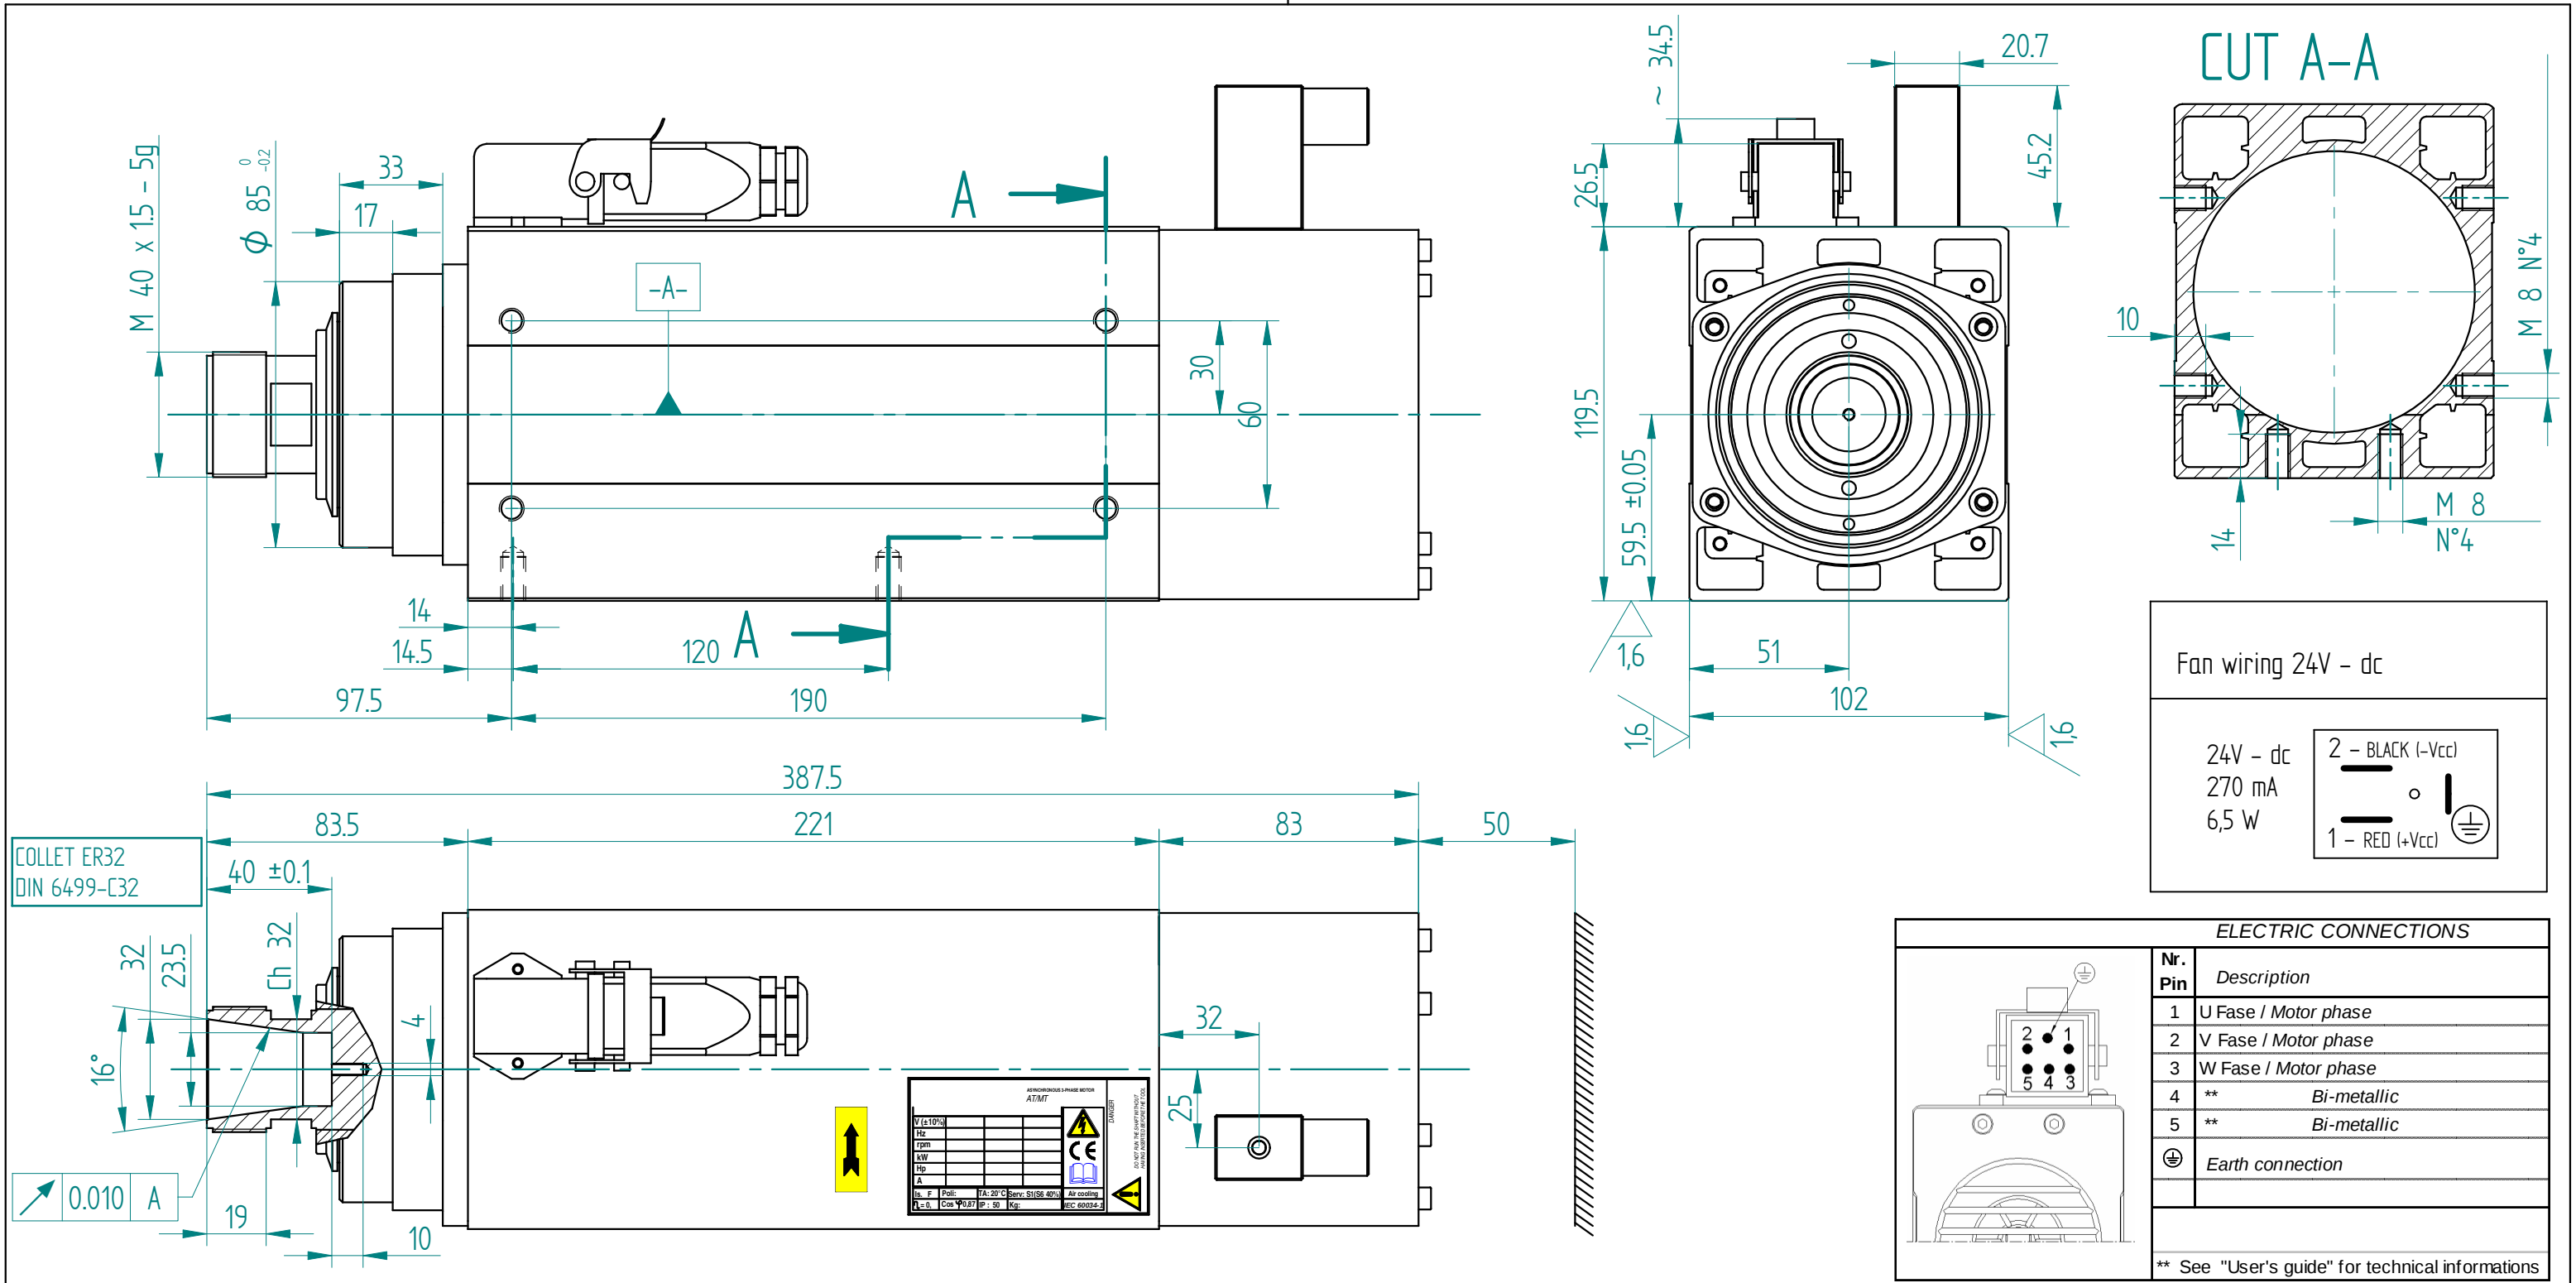

Fan wiring 24V - dc

24V - dc
270 mA
6,5 W

2 - BLACK (-Vcc)
1 - RED (+Vcc)

ELECTRIC CONNECTIONS

Nr. Pin Description

1	U Fase / Motor phase
2	V Fase / Motor phase
3	W Fase / Motor phase
4	** Bi-metallic
5	** Bi-metallic
⊕	Earth connection

** See "User's guide" for technical informations

PERFORMANCES AND MOTOR RATINGS

Voltage	V ±10%	380	380	380
Output Power	kW	3,9 (5,1)	3,9 (5,1)	3,5 (4,5)
Current	A	8,3 (10,5)	8,3 (10,5)	7,4 (10)
Frequency	Hz	300	350	400
rpm	rpm	18000	21000	24000
Torque	Nm	2,07 (2,71)	1,77 (2,32)	1,39 (1,79)
Front Bearing		ceramic	ceramic	ceramic
Post. Bearing		radial	radial	radial
Efficiency	η	0,82		
Power factor	cos ϕ	0,86		
Poles		2		
Service type		S1 (S6 40%)		
Insulation class		F		
Cooling		electro ventilation		
Weight	Kg	10		
Type of Protection	IP	50		

www.elektromotoren.de

UNI-ISO 22768-FH

Y6162Y0076